



1350T-3 Electrical Tape

Flame Retarded, Triple-Layer Polyester Film Tape with Acrylic Pressure-Sensitive Adhesive for use as Reinforced Insulation.

Product Description

3M™ 1350T-3 Tape is a flame retarded, triple-layer polyester film tape which has UL component recognition for use as REINFORCED INSULATION as specified in UL 60950 para 2.10.5.2 It also offers excellent solvent resistance, good quick stick, even unwind, and is suitable for use on automatic taping equipment.

- UL 60950 Recognized for Reinforced Insulation Requirements
- UL Recognized Flame Retardant
- UL Recognized Class 130°C
- UL Recognized CTI Group II
- Decabromo Diphenyl Oxide (DBDPO) Free
- Solvent resistant without thermosetting
- 3M Logo Imprinted for Identification

Color

Standard - Yellow

Applications

3M 1350T-3 Flame Retarded, Triple-layer Polyester Film Tape with Acrylic Pressure-Sensitive Adhesive is designed for use as inner-layer insulation on transformer magnet wire windings where REINFORCED INSULATION is required.

UL Component Recognition


UL recognized for use at temperature not exceeding 130°C, for Reinforced Insulation per UL 60950, flame retardant per UL 510, and UL CTI Group II rated. The UL File Number is E17385, Product Category OANZ2. The file contains data which will facilitate acceptance in specific end use applications as REINFORCED INSULATION. Underwriters Laboratories (UL) Recognized products are evaluated for use as components of end-product equipment that is Listed or Classified by UL. To achieve Underwriters Laboratories Recognition, component construction must meet UL specifications and conditions of acceptability for proper and safe use of the component products.

1350T-3 Flame Retarded, Triple-Layer Polyester Film Tape with Acrylic Pressure Sensitive Adhesive


Properties	Typical Values
Adhesive	Acrylic Pressure Sensitive
Backing	Triple-Layer PET Film
Total Thickness	4.5 mils / 0.11 mm
Color	Yellow
Temperature Class	130°C (266°F)
Adhesion to Steel	25 oz/in (0.71Kg/in)
Insulation Resistance	>1 x 10 ⁶ megohms
Breaking Strength	77 lbs./in (35 Kg/in)
Elongation (% at break)	50 %
Dielectric Breakdown	10.5 KV
Electrical Strength per UL 1950-Para 5.1 – Any 2 layer combination	5.5 KV
UL 510 Flame Retardant	Pass
CTI Group	II
Electrolytic Corrosion Factor ³	1.0

Application Example

One Layer (3 Wraps)

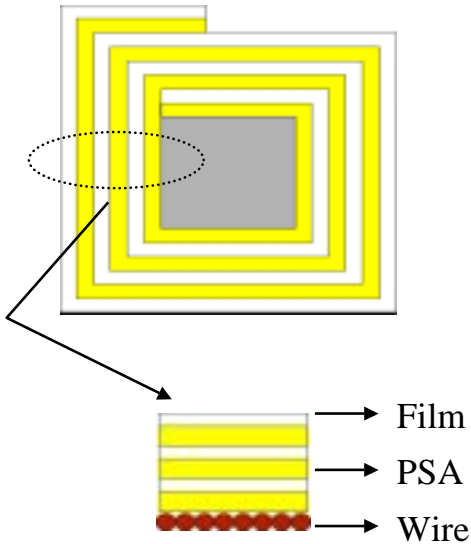

Triple-Layer (1 Wrap)

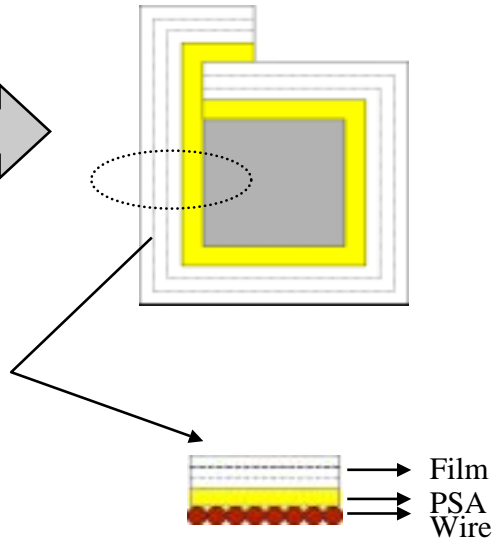

Note: Typical properties are not recommended for specification purposes. Product specifications will be provided upon request.

3M is a trademark of 3M.

Important Notice

All statements, technical information and recommendations related to the Seller's products are based on information believed to be reliable, but the accuracy or completeness thereof is not guaranteed. Before utilizing the product, the user should determine the suitability of the product for its intended use. The user assumes all risks and liability whatsoever in connection with such use.

Any statements or recommendations of the Seller which are not contained in the Seller's current publications shall have no force or effect unless contained in an agreement signed by an authorized officer of the Seller. The statements contained herein are made in lieu

of all warranties, expressed or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose which warranties are hereby expressly disclaimed.

SELLER SHALL NOT BE LIABLE TO THE USER OR ANY OTHER PERSON UNDER ANY LEGAL THEORY, INCLUDING BUT NOT LIMITED TO NEGLIGENCE OR STRICT LIABILITY, FOR ANY INJURY OR FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES SUSTAINED OR INCURRED BY REASON OF THE USE OF ANY OF THE SELLER'S PRODUCTS THAT WERE DEFECTIVE.

3M

Electrical Products Division

6801 River Place Blvd.
Austin, TX 78726-9000
800 676 8381
<http://www.3M.com/elpd>

© 3M 2003